B-Scan		A-Scan	
Ultrasound Probes	Sealed magnetic-drive B-probes with 12 MHz or 20 MHz B-probes with focused transducers	Ultrasound Probe Scan Modes	10 MHz A-probe Selectable immersion or direct contact A-scan wi
Scan Settings	Selectable scan setting profiles to optimize image quality, including presets for orbit, vitreous body,		manual or automatic capture (cataract, dense cataphakic, and pseudophakic modes)
Scan Sampling	retina surface, and deep retina / choroid 256-ray scan with 2048 sample points for each ray (> half-million sample points per transducer sweep)	Measurements	Auto calculation of axial length, anterior chambe depth, lens thickness, and vitreous length Individual zone velocity selection
Scan Controls	Fully adjustable time-varied gain (TVG), baseline, log gain, and exponential gain (e-gain) Adjustable velocity (for eyes with silicone oil)		Axial length average and standard deviation prov for up to 10 scans per exam On-board calibration
Scan Position	One-click selection of axial or longitudinal scan clock	IOL Formulas and	Refractive IOL Formulas: Binkhorst, Regression-II,
Indicator	position with eye model confirmation Free-form text for scan position details that auto annotate onto images and video clips	Selection	Theoretic/T, Holladay, Hoffer-Q, Haigis Post-Refractive IOL Formulas: Latkany Myopic, Latkany Hyperopic, Aramberri Double-K
Video Clips	Capture and store custom length video clips up to 20 fps Replay in real-time, scalable slow motion, or one frame at a time	Diagnostic A-Scan	Integrated customizable lens database with selectable user profiles Optional diagnostic A-scan module
	Store up to 50 video clips per exam, easily add or remove video clips from exam record	Pachymetry	8 MHz diagnostic A-scan probe
Images	Separately save any number of individual frames from video clips as images, complete with annotation(s)	Ultrasound Probe Range	20 MHz pachymeter probe 300-1000 microns
A-Scan Trace	Superimpose arbitrary A-scan trace onto images with a single button click	Clinical Accuracy Electronic Accuracy	±5 μm ±1 μm
Measurement	Unlimited measurements using linear calipers and angle measurement tool	Measurements	Automatic sensing algorithm 32 instantaneous measurements averaged with
B-Biometry	Automatically populates B-Biometry parameters into preferred formulas for calculation of IOLs		standard deviation for each reading Auto calibration and probe test
UBM			Adjustable corneal tissue velocity Central corneal thickness (CCT) and peripheral
Ultrasound Probes	HD magnetic-drive water path probe with 35 MHz or 50 MHz focused transducers		Selectable measure mode to take one reading at time or auto-capture 5 readings successively
Scan Settings	Selectable scan setting profiles to optimize image quality, including presets for sulcus-to sulcus, angle detail, motion picture, and high resolution	Scan Modes	Measurement review Single point – single reading Single point – multiple readings
Scan Sampling	256-ray scan with 2048 sample points for each ray (> half-million sample points per transducer sweep)		Multiple points – single reading Multiple points – multiple readings
Scan Controls	Fully adjustable time-varied gain (TVG), baseline, log gain, and exponential gain (e-gain)	IOP Correction	Auto IOP correction based on CCT Multiple published and customizable IOP correct
Scan Position Indicator	One-click selection of axial or longitudinal scan clock position with eye model confirmation Free-form text for scan position details that auto	General	formulas available USB foot pedal
Video Clips	annotate onto images and video clips Capture and store custom length video clips up to 20 fps	Computer	Wireless keyboard and mouse Intel Pentium N4200 1.1 GHz (2.0 GHz turbo) qua
	Replay in real-time, scalable slow motion, or one frame at a time Store up to 50 video clips per exam, easily add or	System Memory Hard Drive	8 GB DDR3L 1600 MHz memory 500 GB SSD solid-state drive (standard) 1 TB SSD solid-state drive (optional)
Images	remove video clips from exam record Separately save any number of individual frames from video clips as images, complete with annotation(s)	Operating System	Windows 10 IoT Enterprise 2019 Multilanguage LTSC version ensuring 10 years of security update
A-Scan Trace	Superimpose arbitrary A-scan trace onto images with a single button click	Connections	without requiring version upgrade Two (2) USB 3.0 ports GigE Ethernet LAN port
Measurement	Unlimited measurements using linear calipers and angle measurement tool		HDMI port Bluetooth 4.0
Analysis Tools	Angle analysis quantification tool Eye tracking alignment tool	Scanning Option	WiFi 802.11n dual-band Quick Mode or save patient data
Accessories	Set of 4 immersion cups included	Data Exchange Printers	DICOM-compliant (optional) Any Windows-compatible printer



www.sonomedescalon.com 800-227-1285 or +1 516-354-0900 info@sonomedescalon.com 1979 Marcus Avenue C105 New Hyde Park, NY 11042 USA

power supply


Console Dimensions



Detailed exam reports for printing or exporting 13.3" w x 8.0" d x 2.0"h (33.8 cm x 20.3 cm x 5.1 cm)

100-240 VAC, 50/60 Hz auto-switching medical-grade



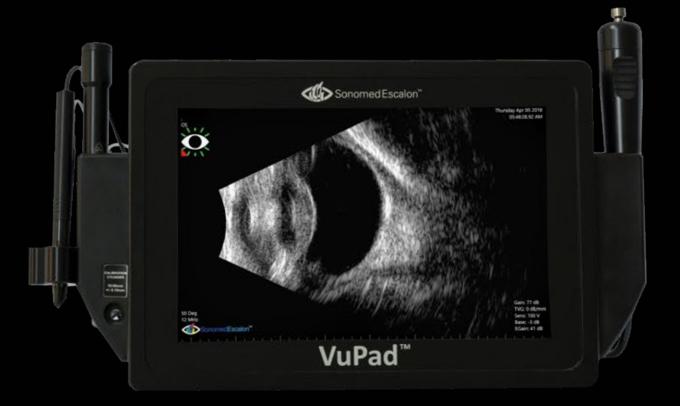




VuPac INNOVATION IN ULTRASOUND YOU CAN SEE AND TOUCH

One system. Multiple options.


Choose from any combination of modalities of A-scan, B-scan, UBM, and/or Pachymetry



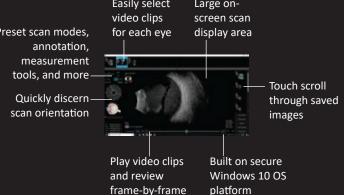

Intuitive. Efficient workflow.

Quickly perform and review ultrasound exams with easy to use touch interface, preset scan modes to effortlessly optimize image quality for area of interest, frame-by-frame review of up to 12 video clips, use of touch pinch zoom, and more.

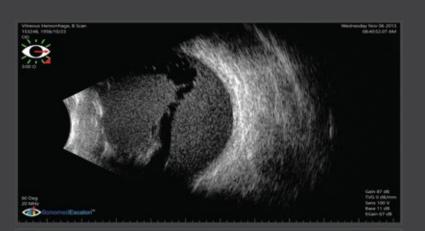



Unparalleled Image quality.

The better the image, the more accurate the diagnosis. Next generation electronic hardware, magnetic drive low-noise probes, optimized and customizable scan settings, peerless signal processing, and integrated Enhanced Focus Rendering™ software provides superior B-scan and UBM image quality.




Tools to help align, measure, diagnose, and monitor

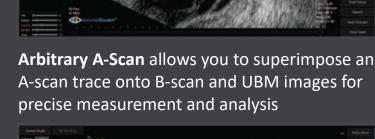


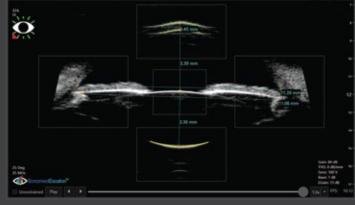

Eye Tracking Alignment provides real-time feedback to ensure proper alignment of UBM scans for sulcus-to-sulcus measurements

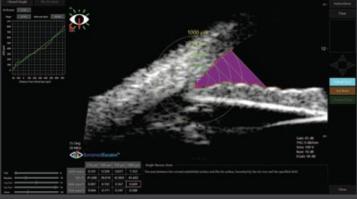

Advanced Angle Analysis allows accurate quantification and tracking of angle properties, including differences during mydriatic and miotic conditions

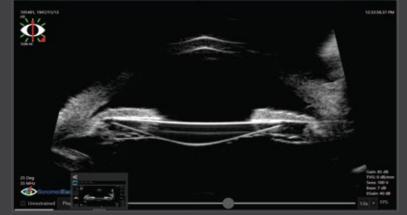

Elegant. Exceptional.

Intuitive graphic interface and multi-touch screen, VuPad puts everything at your fingertips. Compact ergonomic form factor, fully adjustable integrated tabletop stand, and VESA mount puts VuPad where you need it in minimal space.









Bluetooth HDMI USB (2x) Ethernet DICOM





Connected. Integrated.

Easily connect VuPad to your network, wireless keyboard, external monitor, EHR, and/or PACS